

MAXI-FILTRA™

Active Carbon Filter to eliminate bad odours produced by the drainage system

For vertical or horizontal external installation on open vent pipes, the Maxi-Filtra is a two-way active carbon filter. For best results, install in conjunction with the Handi-Vent 4 Air Admittance Valve (AAV).



Where to install the Maxi-Filtra?

- ✓ Septic tanks
 - ✓ Grease separators
 - ✓ Rain water tanks
 - ✓ Sewage treatment plants
- In conjunction with AAVs of an appropriate airflow:
- ✓ Lifting equipment
 - ✓ Building drainage open vents

Why choose the Maxi-Filtra?

- ✓ **Save money** by eliminating the need for odour-reducing additives in septic tank installations.
- ✓ Easy **retrofit** installation to solve existing problems.
- ✓ Simple **push-fit connection** to all brands of UK-domestic soil pipe.
- ✓ Designed to **resist extreme temperatures** and deterioration.
- ✓ **Low maintenance** – just replace the carbon filter cartridge a minimum of every two years.



Produced by the only **specialist manufacturer** of drainage ventilation products, the Maxi-Filtra comes with a **full warranty** against manufacturing defects.*

* see website for details

by
STUDOR®
INVENTIVE TECHNOLOGY

www.bystudor.com

For technical enquiries contact:
Tel: 0844 809 44 59
Fax: 0845 601 32 93
Email: sales@bystudor.com

MAXI-FILTRA™


**Active Carbon Filter to eliminate bad odours
produced by the drainage system**



Installation Guidelines

- Install in a clean air environment, free of dust, grease and solvents.
- Position in an external accessible location, as close as possible to the tank.
- Install a minimum of 500mm above ground level or snow level.
- The stack pipe must be cut square and free from dirt and swarf.
- Install horizontally, at an angle or vertically.
- The replaceable cartridge should only be removed from its foil packaging and inserted after all building work in the installation area has been fully completed.
- Replace the filter cartridge two-yearly as a minimum or, in areas of high odour saturation, when odour becomes noticeable.
- Use with the Aluminium Cover, including insulating cap, for installations requiring additional protection. This may also be painted to blend in with the surroundings.
- Follow your local building / plumbing regulations.

Connection Options

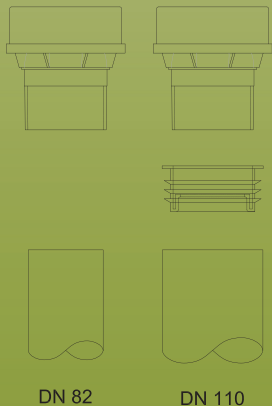

DN 82

DN 110

Additional protection



Sample Installation

for more sample installations
visit www.bystudor.com

